

MICRO LIFTING STATION

INSTALLATIONS AND USE

. The macerating pumping system has been designed to pump away the waster from WC, washbasin, bidet, shower, domestic kitchen sink, dishwasher and washing machine – all working at the same time if required.

. With the help of this system, it is possible to install a complete bathroom in a basement conversion or loft extension, also makes the addition of a domestic kitchen or utility room easy even when below or distant from a drain

. The system is installed in a case specially designed for horizontal outlet spigots, installed and used correctly, this unit will give consistent and reliable service

. The system has a grinder pump and a carbon filter.

. It is provided with flexible sleeves, elbow, metal hose clips

The system takes waste from



Filthy water

Domestic use

PERFORMANCE RANGE

- . Flow rate up to 145l/min
- . Vertical pumping : max. 8m
- . Horizontal pumping : max. 80m
- . 4 inlet: 3x40mm + 1x100mm
- . 1 outlet: 23/28/32/44mm

OPERATION CONDITIONS

- . Voltage : Single phase 220V-240V
- . Frequency : 50Hz
- . Rated power : 400W
- . Protection IPX4
- . Insulation class F
- . Liquid temperature up to +65°C
- . Ambient temperature up to +40°C

OPTIONS AVAILABLE ON REQUEST


- . Special mechanical seal
- . Other voltages or 60Hz frequency
- . Higher or lower liquid temperatures

WC-400




NEW

INSTALLATIONS

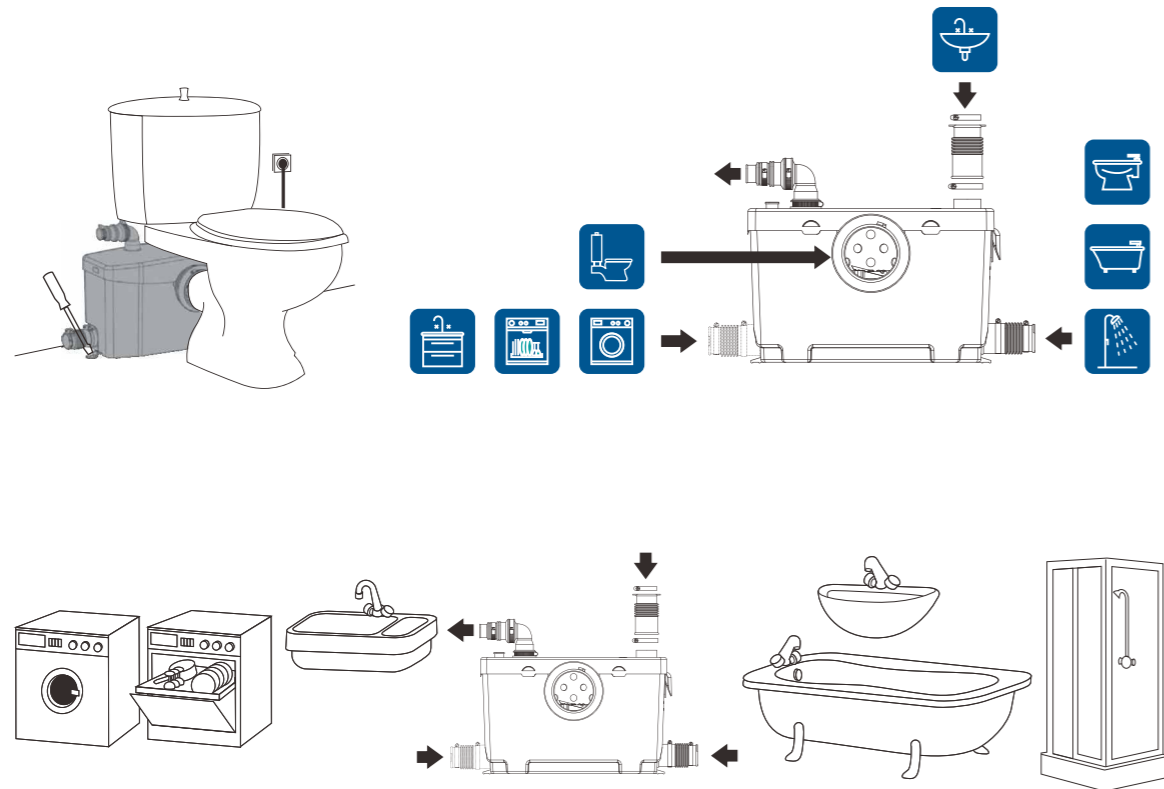

PERFORMANCE

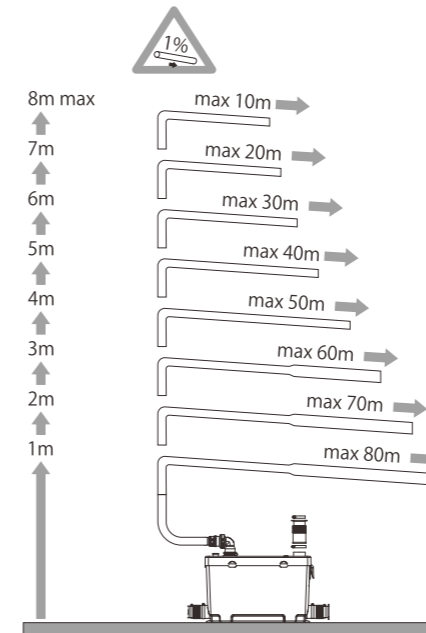

CHARACTERISTIC CURVES

